


EC-RR6



Model Specification Items

EC	—	RR6		—		—		—	
Series	—	Type	Lead	—	Stroke	—	Cable Length	—	Options
			S 20mm H 12mm M 6mm L 3mm		65 1 315 65mm 1 315mm (per 50mm)		0 With terminal block type connector 1 1m 1 1 10 10m		Refer to Options below.



Radial load specification
Radial Cylinder*



- (1) The actuator specifications display the payload's maximum value, but it will vary depending on the acceleration and speed. Please refer to "Table of Payload by Speed/Acceleration" for more details.
- (2) The Radial Cylinder is equipped with a guide. Please refer to P111 for details of the radial loads applied to the rod.
- (3) The value of the horizontal payload assumes the use of an external guide.
- (4) When performing a push-motion operation, please refer to the "Correlation between push force and current limit value." Push force is only a guide.
- (5) Depending on the ambient operating temperature, duty control is necessary. Please refer to P115 for cautions.
- (6) Special attention needs to be paid to the mounting orientation. Please refer to P33 for details.

Stroke			
Stroke (mm)	EC-RR6	Stroke (mm)	EC-RR6
65	○	215	○
115	○	265	○
165	○	315	○

Cable Length	
Cable code	Cable length
0	No cable (with connector)
1 ~ 3	1 ~ 3m
4 ~ 5	4 ~ 5m
6 ~ 10	6 ~ 10m

(Note) Robot cables.

Options

Name	Option code	Reference page
Brake	B	See P.101
Tip adapter (flange)	FFA	See P.101
Flange (front)	FL	See P.102
Foot bracket	FT	See P.103
Tip adapter (female screw)	NFA	See P.106
Knuckle joint (Note 1)	NJ	See P.107
Knuckle joint + oscillation receiving bracket (Note 1)	NJPB	See P.107
Non-motor end specification	NM	See P.108
PNP specification	PN	See P.108
Clevis bracket (Note 1)	QR	See P.108
Clevis bracket + oscillation receiving bracket (Note 1)	QRPB	See P.109
Split motor and controller power supply specification	TMD2	See P.109
Battery-less absolute encoder	WA	See P.109
Wireless communication specification	WL	See P.109
Wireless axis-operation specification	WL2	See P.109

(Note 1) Please purchase a clevis bracket (QR or QRPB) and a knuckle joint (NJ or NJPB) together as a set. Mounting is to be done by customer.

Main specifications

Item		Description			
Lead	Ball screw lead (mm)	20	12	6	3
	Max. payload (kg) (energy-saving disabled)	6	25	40	60
	Max. payload (kg) (energy-saving enabled)	6	25	40	40
Horizontal	Max. speed (mm/s)	800	700	450	225
	Min. speed (mm/s)	25	15	8	4
	Rated acceleration/deceleration (G)	0.3	0.3	0.3	0.3
	Max. acceleration/deceleration (G)	1	1	1	1
	Max. payload (kg) (energy-saving disabled)	1.5	4	10	12.5
Vertical	Max. payload (kg) (energy-saving enabled)	1	4	10	12.5
	Max. speed (mm/s)	800	700	450	225
	Min. speed (mm/s)	25	15	8	4
	Rated acceleration/deceleration (G)	0.3	0.3	0.3	0.3
	Max. acceleration/deceleration (G)	0.5	0.5	0.5	0.5
Push force	Max. thrust force when pushing (N)*	67	112	224	449
	Max. speed when pushing (mm/s)	20	20	20	20
Brake	Brake specification	Non-excitation actuating solenoid brake			
	Brake holding force (kgf)	1.5	4	10	12.5
Stroke	Min. stroke (mm)	65	65	65	65
	Max. stroke (mm)	315	315	315	315
	Stroke pitch (mm)	50	50	50	50

Item	Description
Driving system	Ball screw ϕ 10mm, Rolling C10
Positioning repeatability	\pm 0.05mm
Lost motion	-
Linear guide	Linear motion infinite circulating type
Rod	ϕ 25mm Material: Aluminum Hard alumite treatment
Rod no-rotation precision (Note 2)	0 degree
Ambient operation temperature/humidity	0~40°C, 85%RH or less (Non-condensing)
Degree of protection	IP20
Vibration & shock resistance	4.9m/s ² 100Hz or less
Overseas standards	CE Marking, RoHS (Restriction of Hazardous Substances)
Motor type	Stepper motor
Encoder type	Incremental / battery-less absolute
Number of encoder pulses	800 pulse/rev

(Note 2) The rod tip displacement angle when no load is applied.

* Speed limitation applies to push motion. See the manual or contact IAI.

Table of Payload by Speed/Acceleration

Setting for energy-saving disabled Unit for payload is kg. Operations on the blank locations are not possible.

Orientation	Acceleration (G)					
	Horizontal		Vertical			
Speed (mm/s)	0.3	0.5	0.7	1	0.3	0.5
0	6	6	5	5	1.5	1.5
160	6	6	5	5	1.5	1.5
320	6	6	5	3	1.5	1.5
480	6	6	5	3	1.5	1.5
640	6	4	3	2	1.5	1.5
800	4	3			1	1

Orientation	Acceleration (G)					
	Horizontal		Vertical			
Speed (mm/s)	0.3	0.5	0.7	1	0.3	0.5
0	25	18	16	12	4	4
100	25	18	16	12	4	4
200	25	18	16	10	4	4
400	20	14	10	6	4	4
500	15	8	6	4	3.5	3
700	6	2			2	1

Orientation	Acceleration (G)					
	Horizontal		Vertical			
Speed (mm/s)	0.3	0.5	0.7	1	0.3	0.5
0	40	35	30	25	10	10
50	40	35	30	25	10	10
100	40	35	30	25	10	10
200	40	30	25	20	10	10
250	40	27.5	22.5	18	9	8
350	30	14	12	10	5	5
400	18	10	6	5	3	3
450	8	3			2	1

Orientation	Acceleration (G)					
	Horizontal		Vertical			
Speed (mm/s)	0.3	0.5	0.7	1	0.3	0.5
0	60	50	45	40	12.5	12.5
50	60	50	45	40	12.5	12.5
100	60	50	45	40	12.5	12.5
125	60	50	40	30	10	10
175	40	35	25	20	6	5
200	35	30	20	14	5	4.5
225	16	16	10	6	5	4

■ **Setting for energy-saving enabled** Unit for payload is kg. Operations on the blank locations are not possible

Lead 20

Orientation	Horizontal			Vertical		
	Acceleration (G)			Acceleration (G)		
Speed (mm/s)	0.3	0.7	0.3	0.3	0.7	0.3
0	6	5	1			
160	6	5	1			
320	6	5	1			
480	4	3	1			
640	3	1	0.5			

Lead 12

Orientation	Horizontal						Vertical					
	Acceleration (G)						Acceleration (G)					
Speed (mm/s)	0.3	0.5	0.7	1	0.3	0.5	0.3	0.5	1	0.3	0.5	
0	25	10	4	30	8	8						
100	25	10	4	30	8	8						
200	25	10	4	20	7	7						
300	20	8	3	10	4.5	4						
400	10	5	2	2	2	1						
500	5	2	1									

Lead 6

Orientation	Horizontal						Vertical					
	Acceleration (G)						Acceleration (G)					
Speed (mm/s)	0.3	0.5	0.7	1	0.3	0.5	0.3	0.5	1	0.3	0.5	
0	40	20	10	40	18	18						
50	40	20	10	40	18	18						
100	40	20	10	40	16	12						
150	40	20	8	26	10	9						
200	35	18	5	11	5	4						
250	10	6	3									

Lead 3


Orientation	Horizontal						Vertical					
	Acceleration (G)						Acceleration (G)					
Speed (mm/s)	0.3	0.5	0.7	1	0.3	0.5	0.3	0.5	1	0.3	0.5	
0	40	25	12.5	40	18	18						
25	40	25	12.5	40	18	18						
50	40	25	12.5	40	16	12						
75	40	25	12	26	10	9						
100	40	25	9	11	5	4						
125	40	25	5									

Stroke and maximum speed


Lead (mm)	Energy-saving mode	65-215 (per 50mm)	265 (mm)	315 (mm)
20	Disabled		800	
	Enabled		640	
12	Disabled	700	660	480
	Enabled	500		480
6	Disabled	450	325	235
	Enabled	250		235
3	Disabled	225	160	115
	Enabled	125		115

(Unit is mm/s)

Correlation between push force and current limit value

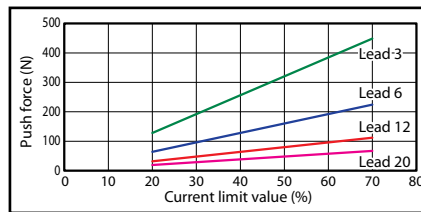


Rod deflection (reference value)

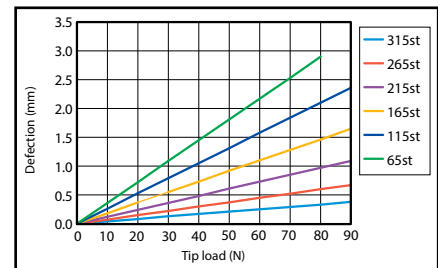

Dimensions

*1 When the rod is returning to its home position, please be careful of interference from surrounding objects, as it will travel until it reaches the M.E.
 *2 The direction of width across flats varies depending on the product. Those flats cannot be used for reference plane.
 (Note) The EC series is equipped with a built-in controller. Please refer to P111 for details.

CAD drawings can be downloaded from our website.
www.intelligentactuator.com

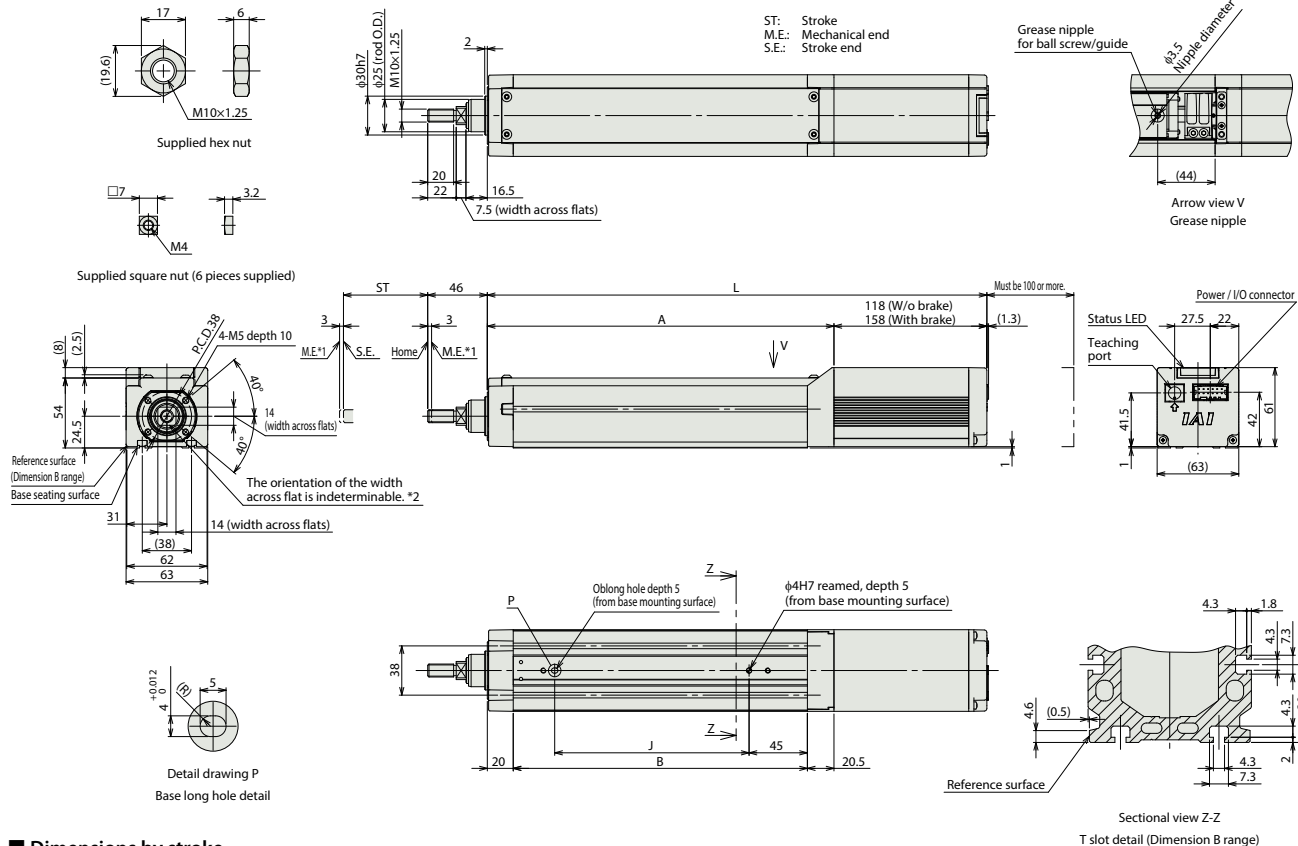

■ **Dimensions by stroke**

L	Stroke	65	115	165	215	265	315
	W/o Brake	335.5	385.5	435.5	485.5	535.5	585.5
With Brake	375.5	425.5	475.5	525.5	575.5	625.5	
A	217.5	267.5	317.5	367.5	417.5	467.5	
B	177	227	277	327	377	427	
J	100	150	200	250	300	350	

■ **Mass by stroke**

Mass (kg)	Stroke	65	115	165	215	265	315
	Without brake	1.7	2.0	2.2	2.5	2.7	3.0
With brake	1.9	2.2	2.4	2.7	3.0	3.2	

Applicable controller

(Note) The EC series is equipped with a built-in controller. Please refer to P116 for details.